



Had a rough start this morning but finally got the bike on the lift and got started on the bottom end

Like
 □ Comment
 ⇔ Share

01










Friend Requests



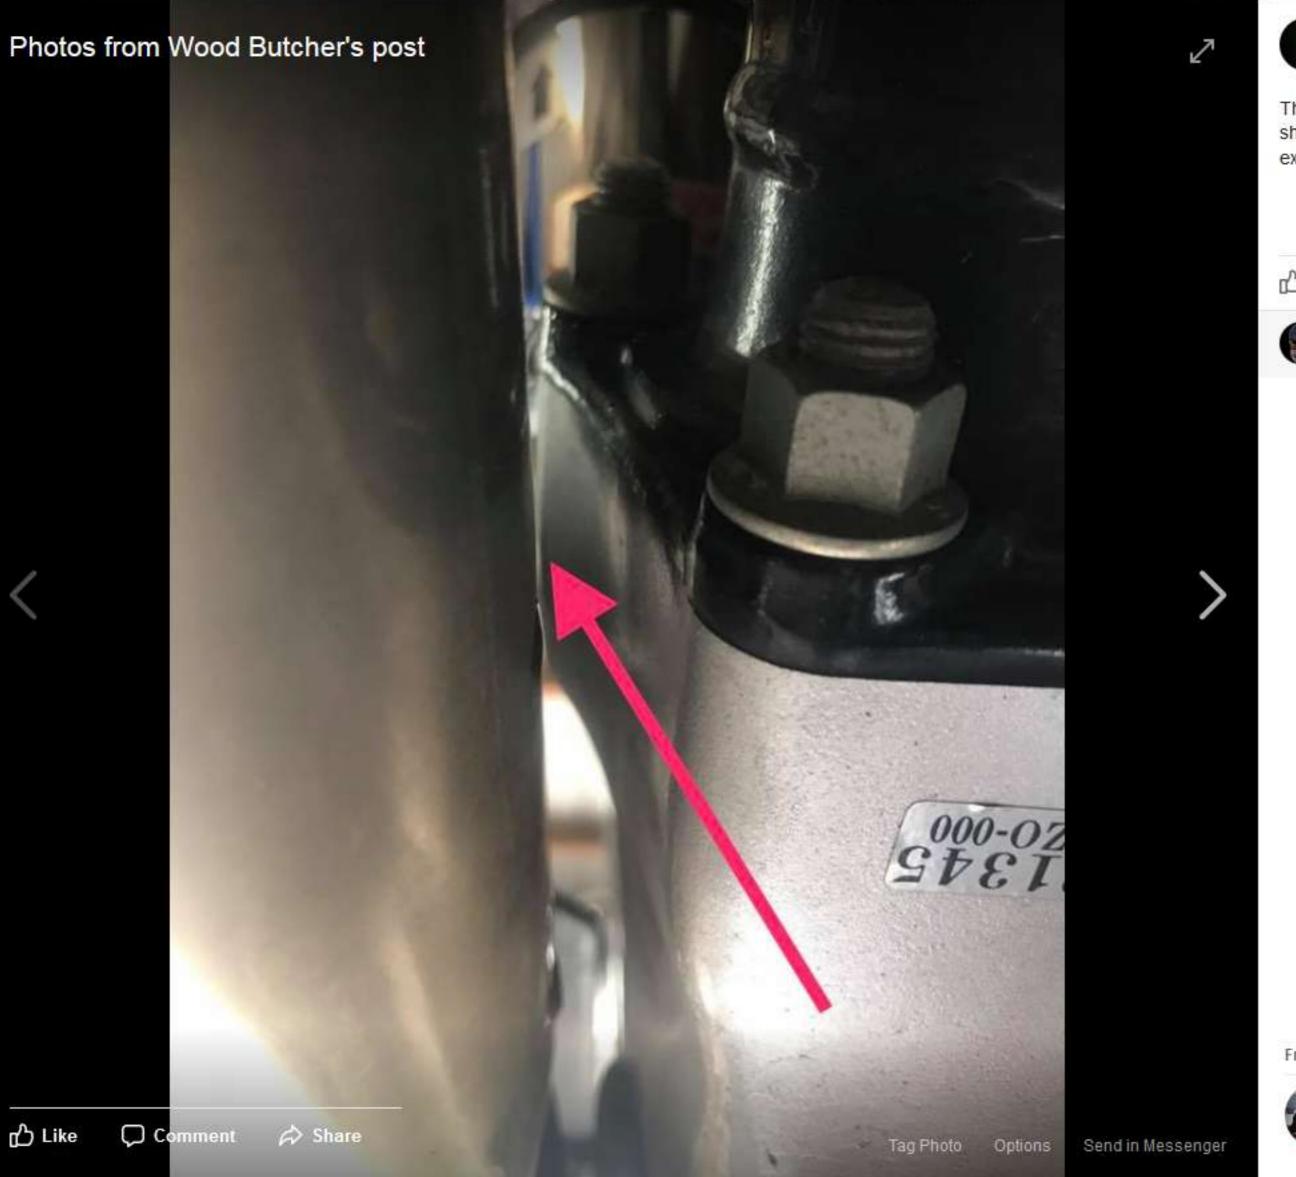



This is looking up from the bottom. If I remove the shocks and let the swingarm down it will hit the exhaust.

Like Comment Share



Write a comment...






© @ @ 0

Friend Requests

See All



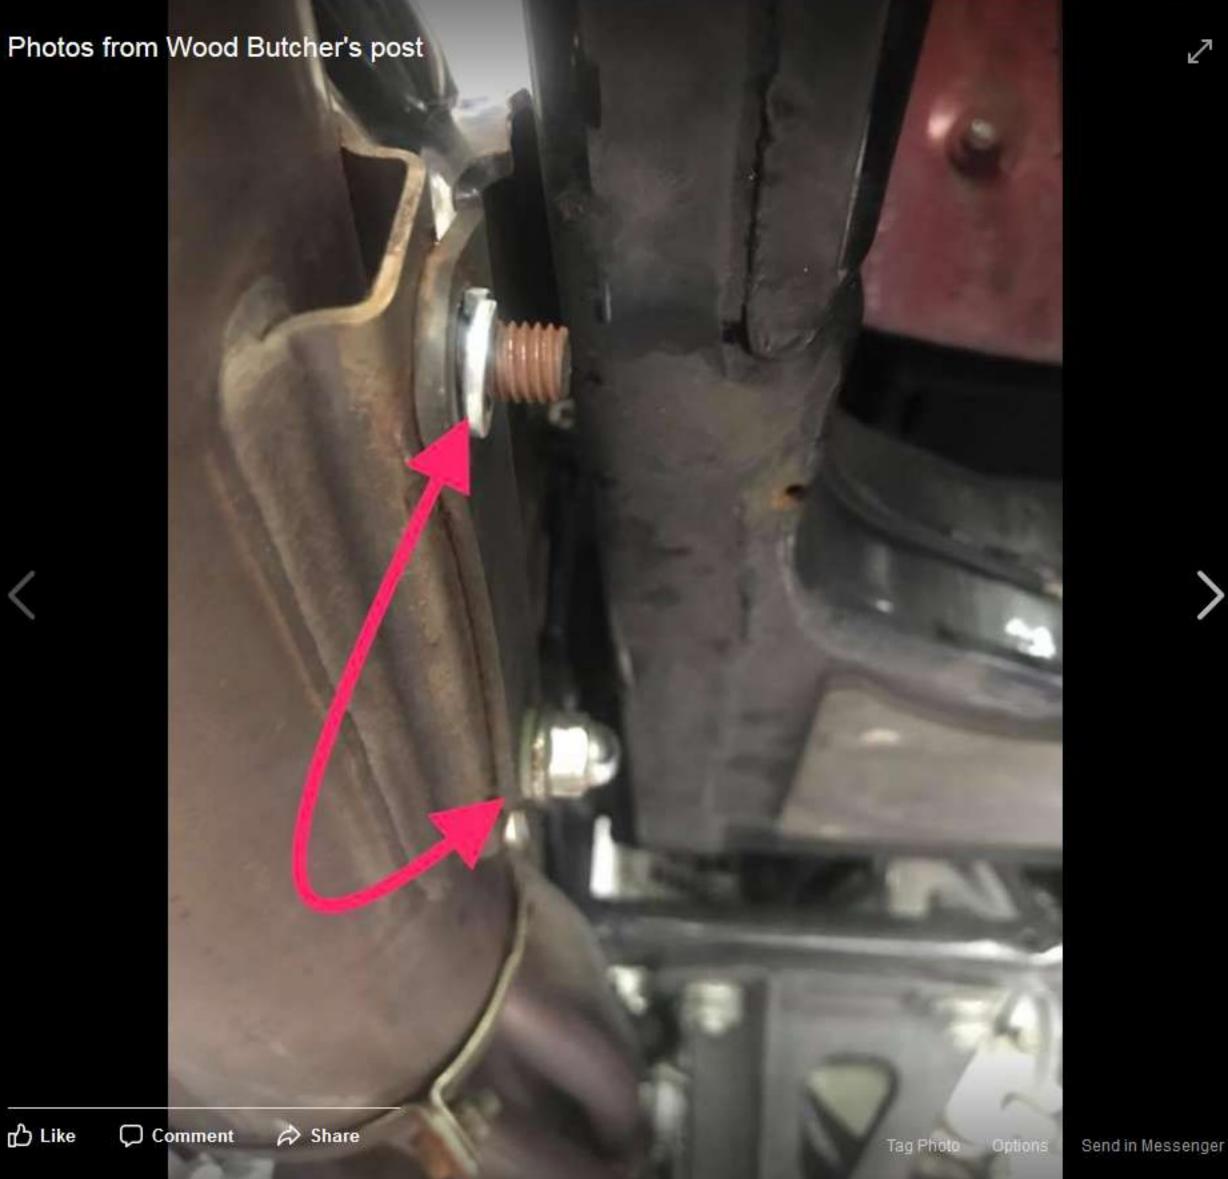




Write a comment...

Friend Requests

See All

© @ @ 0



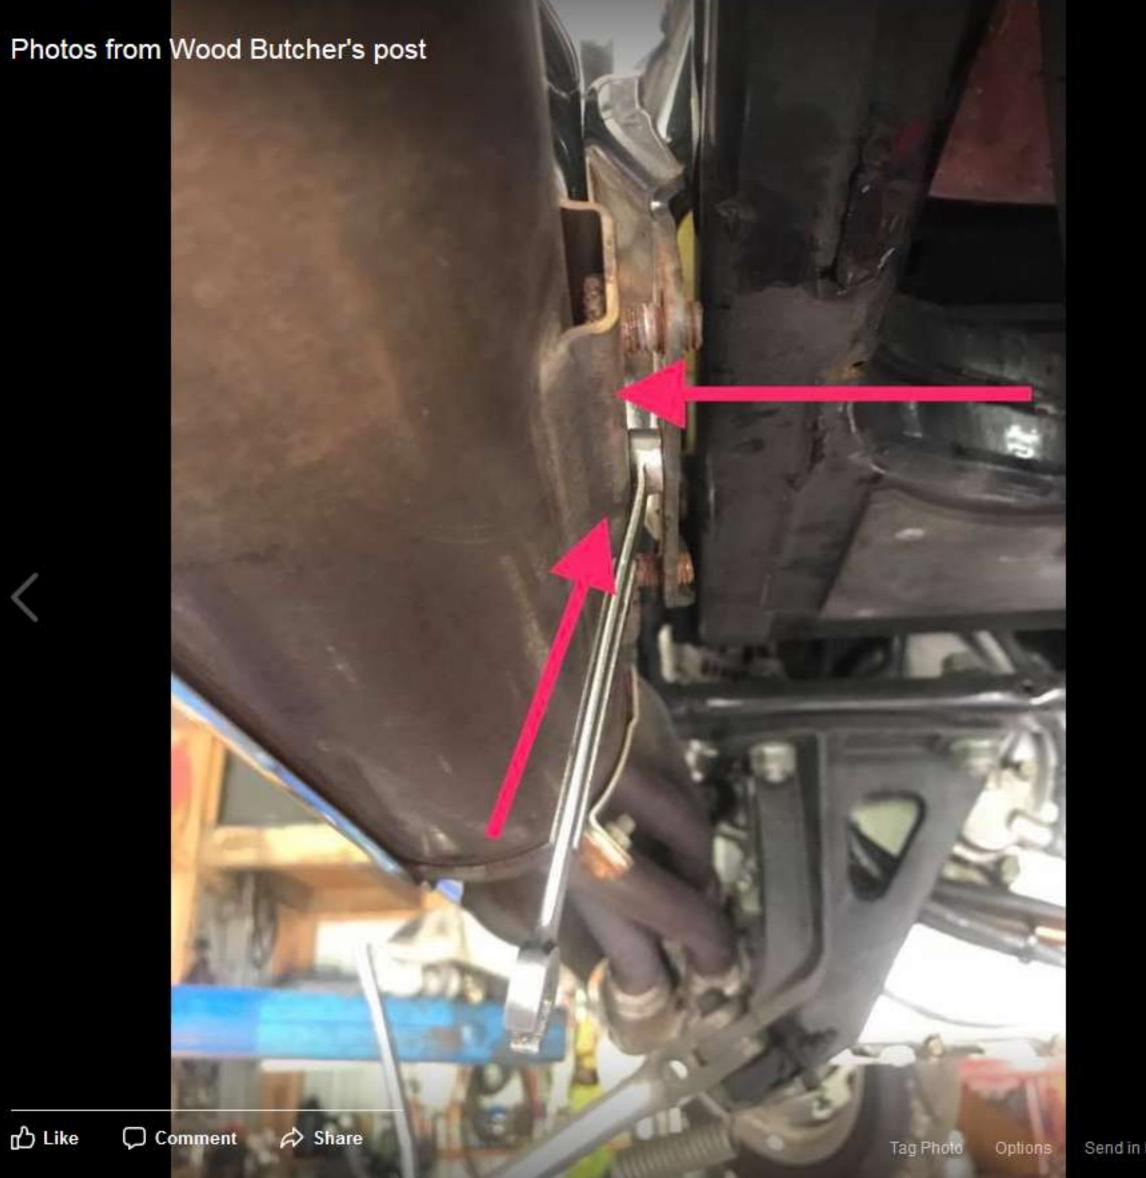



I pry the mufflers out and stick a box end wrench in between the hanger and muffler to shim it out away from the swingarm slightly

Like
 □ Comment
 ⇔ Share



Write a comment...









Friend Requests



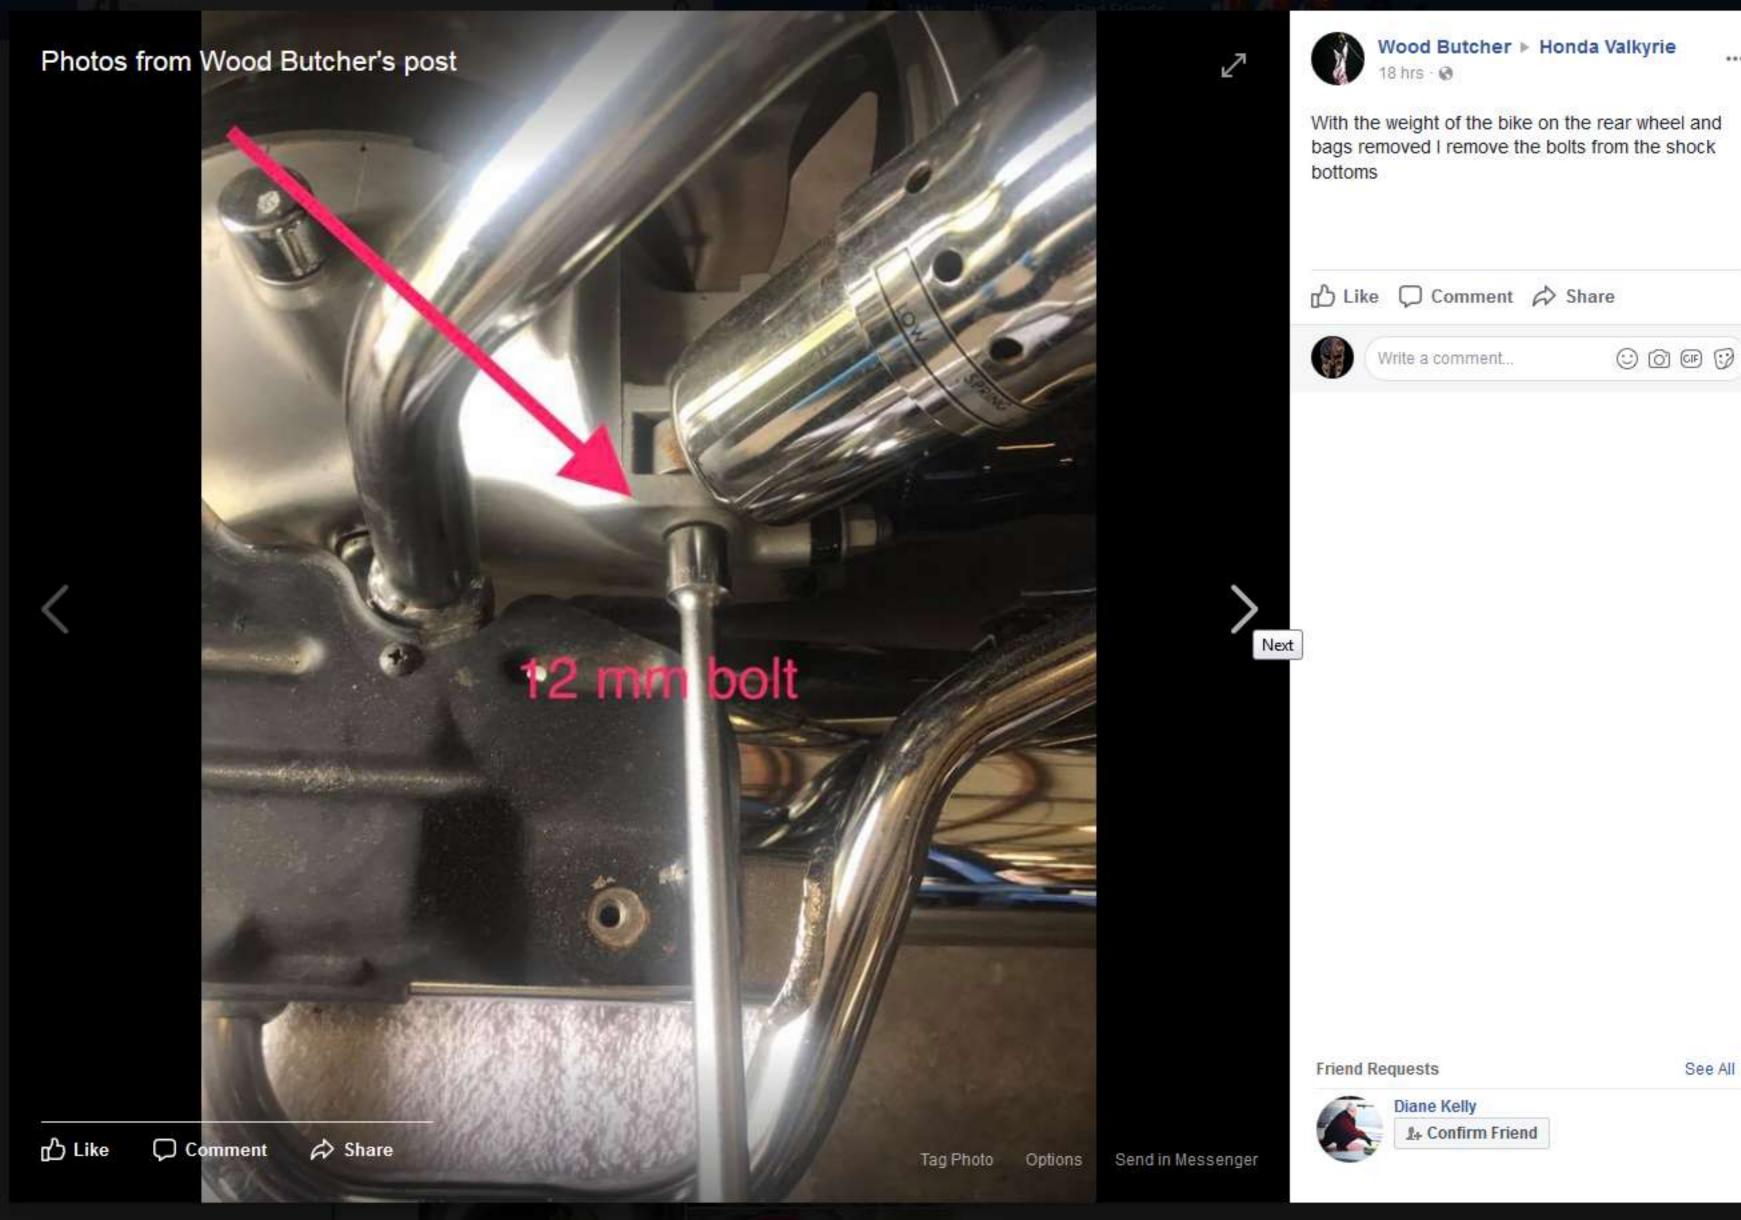

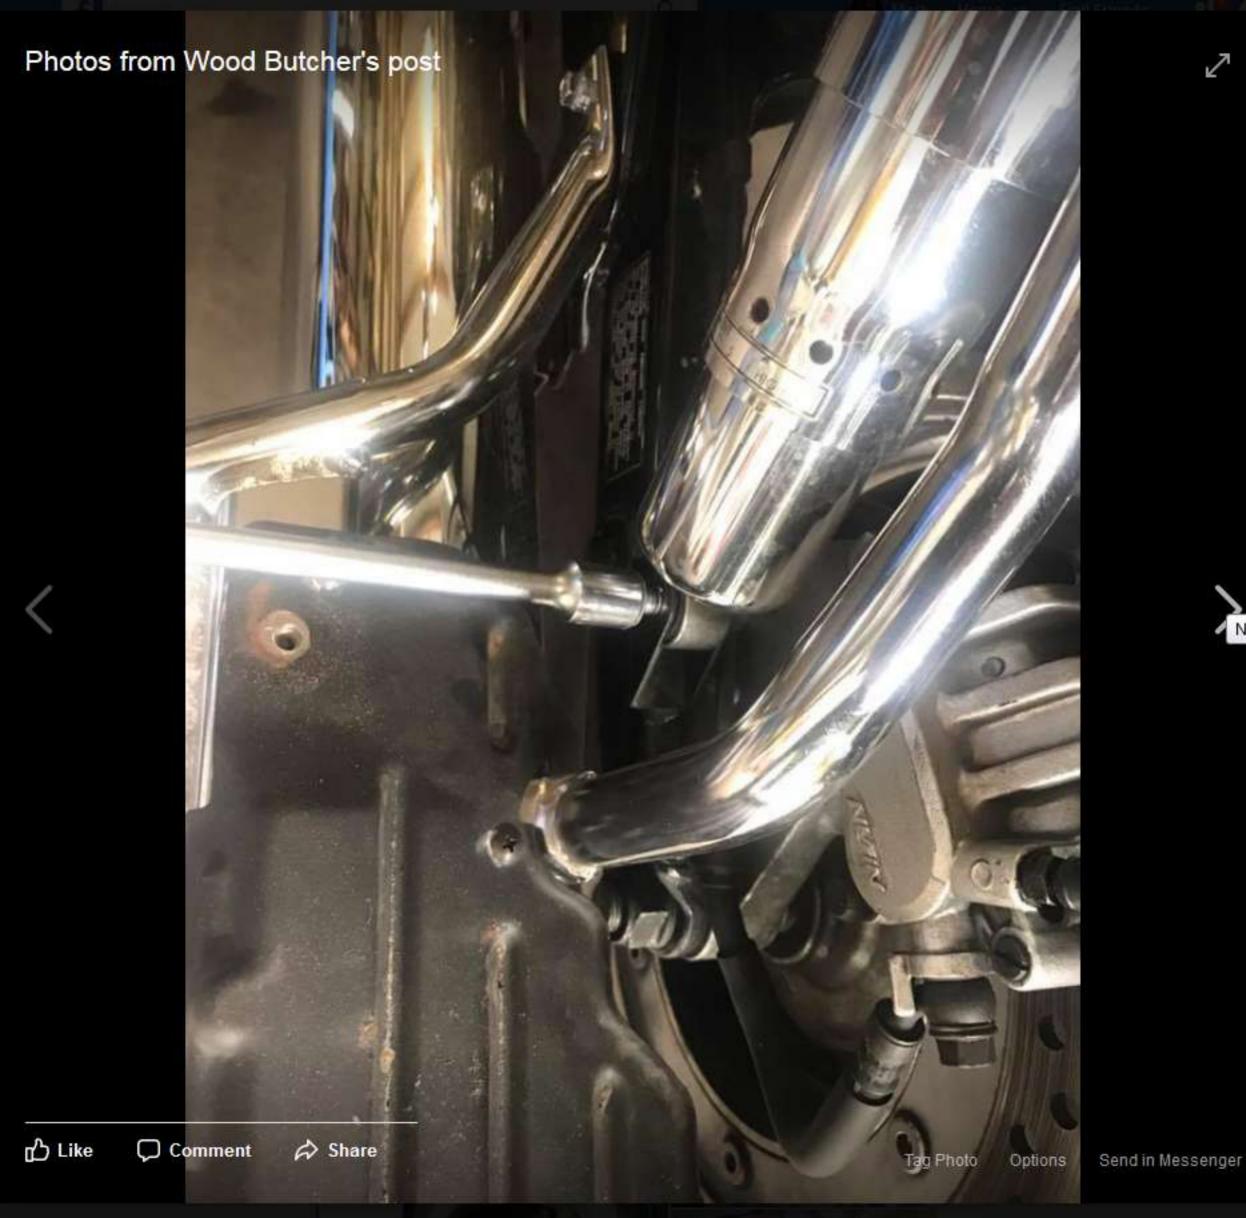



I take both side shocks bottom bolts out

Like
 □ Comment
 ⇔ Share



Write a comment...







Friend Requests







Then remove the top bolts

Like Comment Share


Write a comment...

© @ @ @



Friend Requests



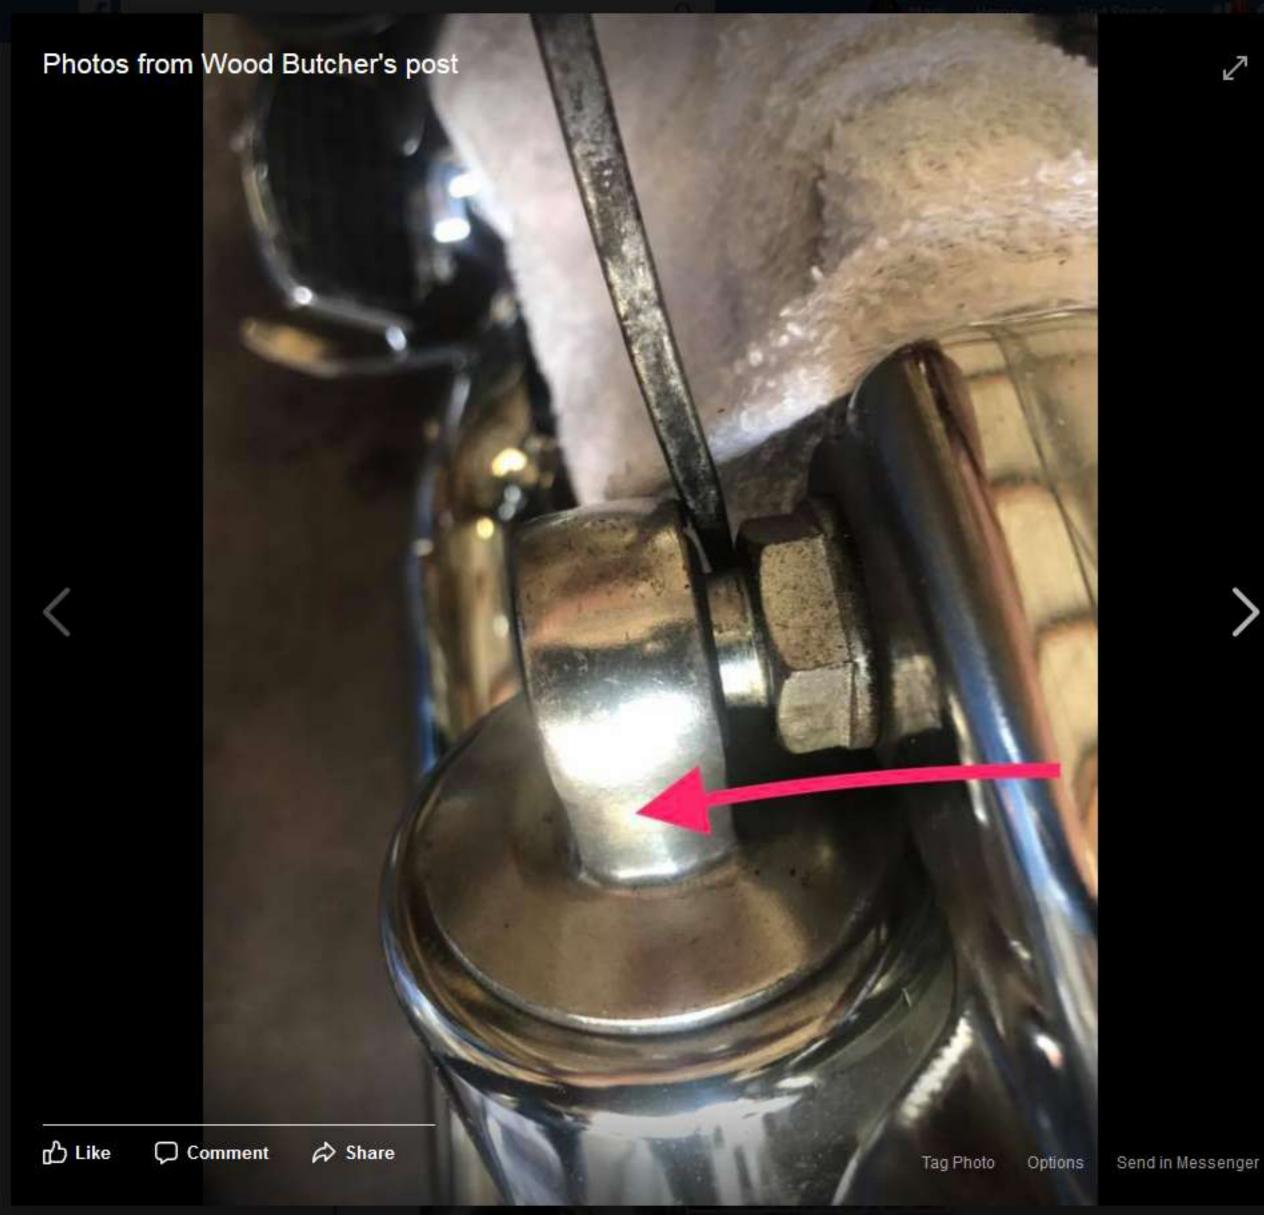



Pry the top of the shock off the frame stud. It helps to take some of the weight off the wheel so it isn't under pressure and will come off easier.

Like
 Comment
 Share





Write a comment...





Friend Requests









18 hrs - 🚱

Once the shocks are off check the shock bushings for wear. These gone bad can make for a squirrelly ride in the curves. These look good

Like
 □ Comment
 ⇔ Share



Write a comment...









See All



Diane Kelly 1+ Confirm Friend

Tag Photo





Same with the bottom bushings

Like
 □ Comment
 ⇔ Share

02


Write a comment...

© @ @ 9

Friend Requests

See All



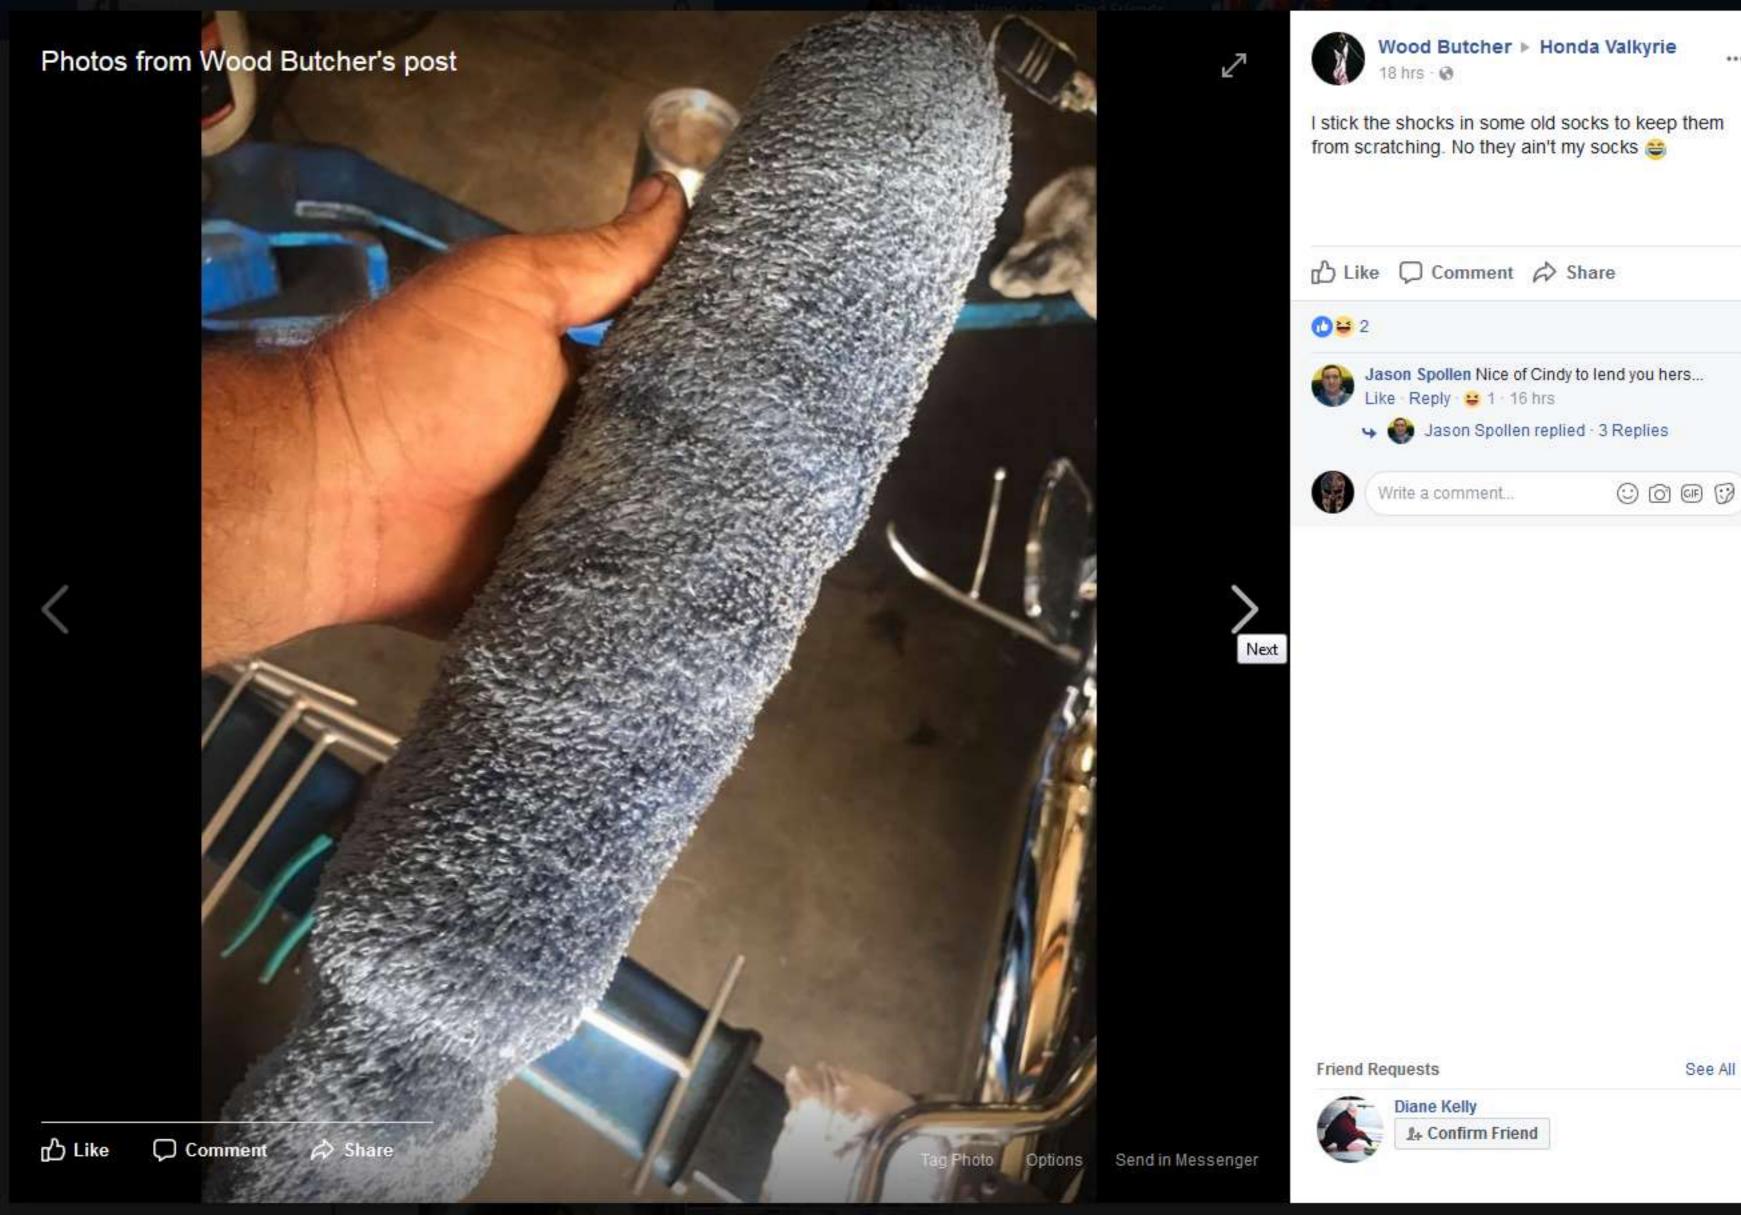





18 hrs - 🚱

Then I loosen the top driveshaft housing nuts. I don't remove them just loosen them so they still have a few threads left before coming off

Like
 □ Comment
 ⇔ Share

01



Write a comment...





① ② @ ①



See All







Then I remove the brake calipers mounting bolt from the left side swing arm.

Like Comment A Share © @ @ 0 Write a comment...



Friend Requests









Then I raise the bike so the tire is just barely setting on the floor and remove the axle nut.

Like
 □ Comment
 ⇔ Share

0 4

Write a comment..







Friend Requests







Sometimes you have to hold the other side with an Allen wrench to keep it from spinning.

Like
 □ Comment
 ⇔ Share

0 2

Write a comment...







Friend Requests





Wood Butcher ▶ Honda Valkyrie

18 hrs - 🚱

I remove the bottom 2 nuts from the driveshaft housing but still leave the top as they were just loosened.

Like Comment A Share



Write a comment...





See All



Diane Kelly 1+ Confirm Friend

Friend Requests



18 hrs - 🚱

To slide the axle out it helps to play with the weight bearing on the floor so the axle isn't binding and will slide right out. You can start the nut back on and tap it lightly to get it started then remove the nut

Like
 □ Comment
 ⇔ Share

Write a comment...



① @ @ Ø



Friend Requests

See All





Slide the axle out the right side

Like
 □ Comment
 ⇔ Share

Write a comment...







Friend Requests











Once the axle is out the brake caliper bracket will lift out

Like Comment Share


02



© @ @ 0


Friend Requests



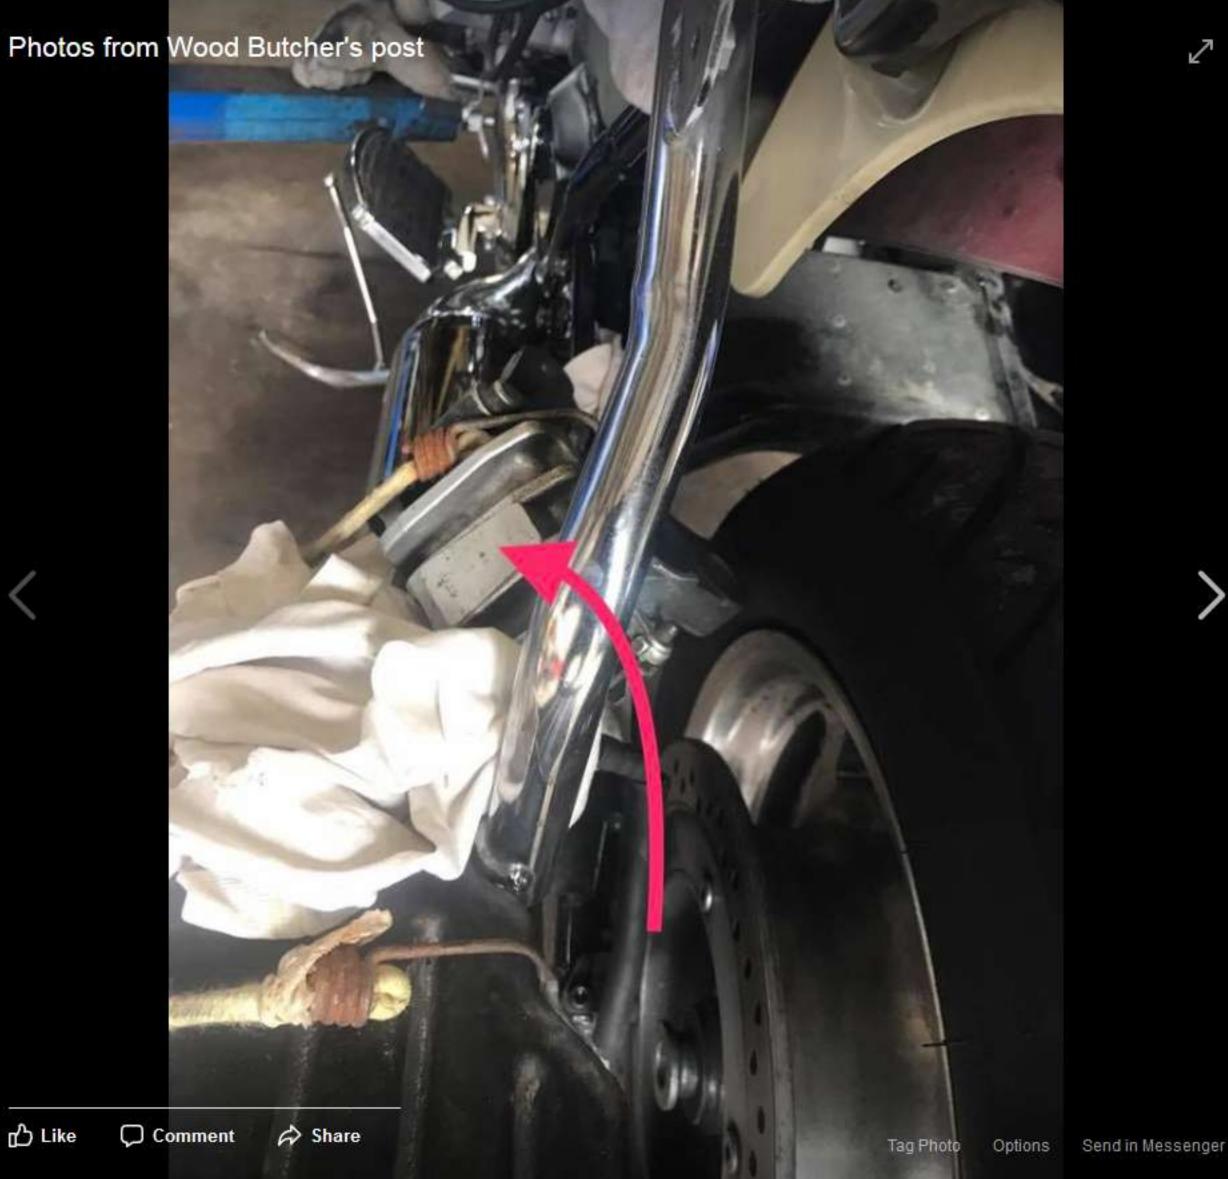




Write a comment...



See All

© @ @ 0



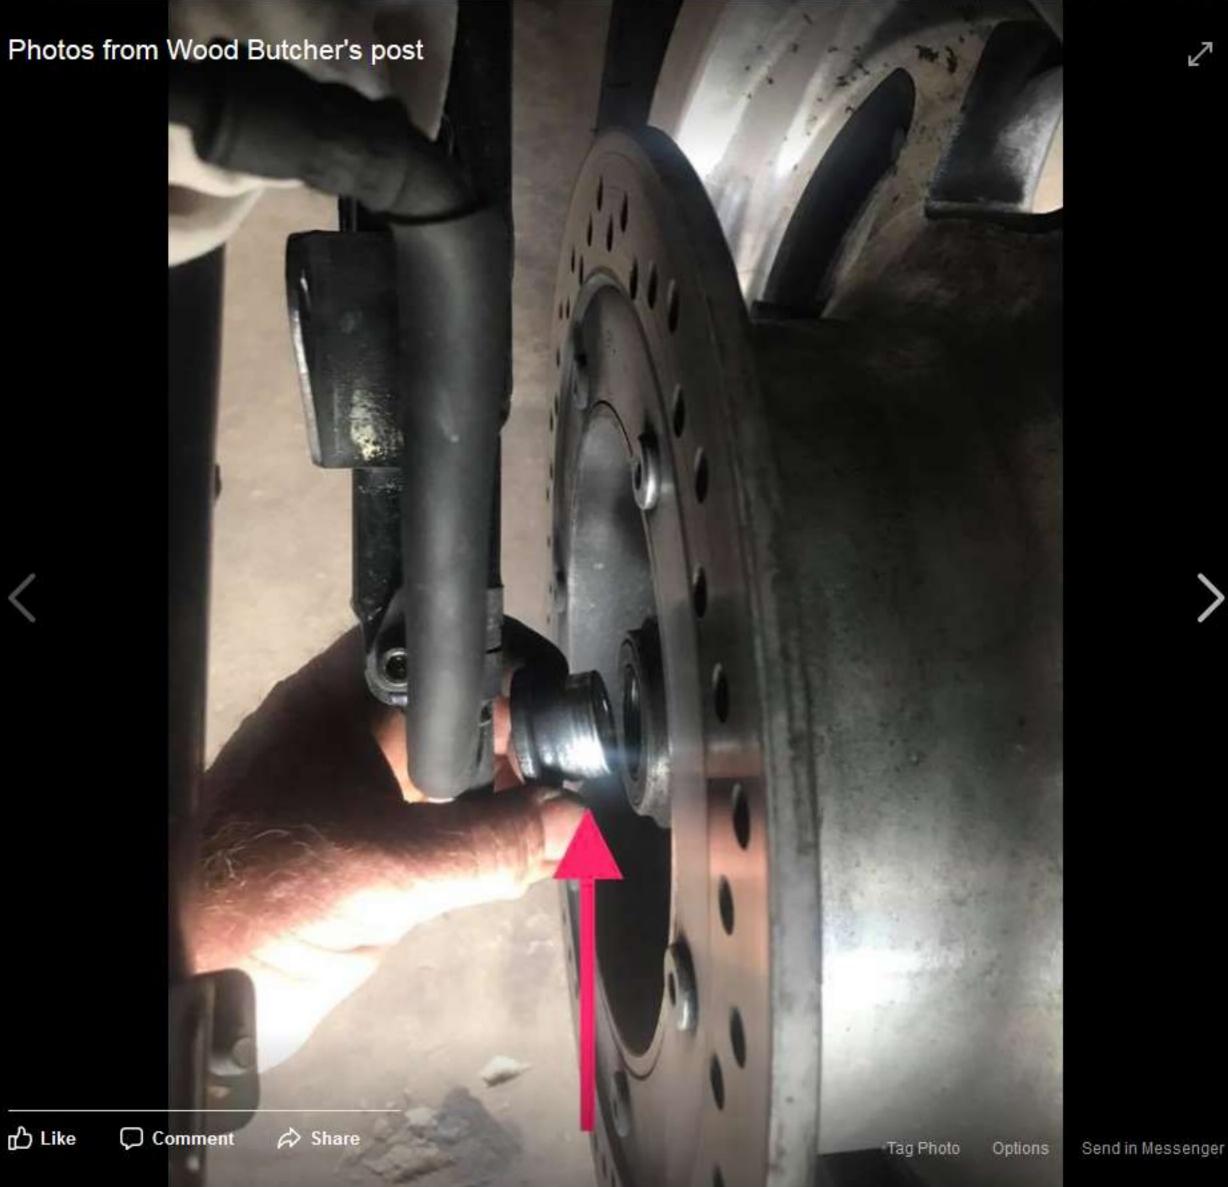




Write a comment...

Friend Requests

See All

© @ @ 0



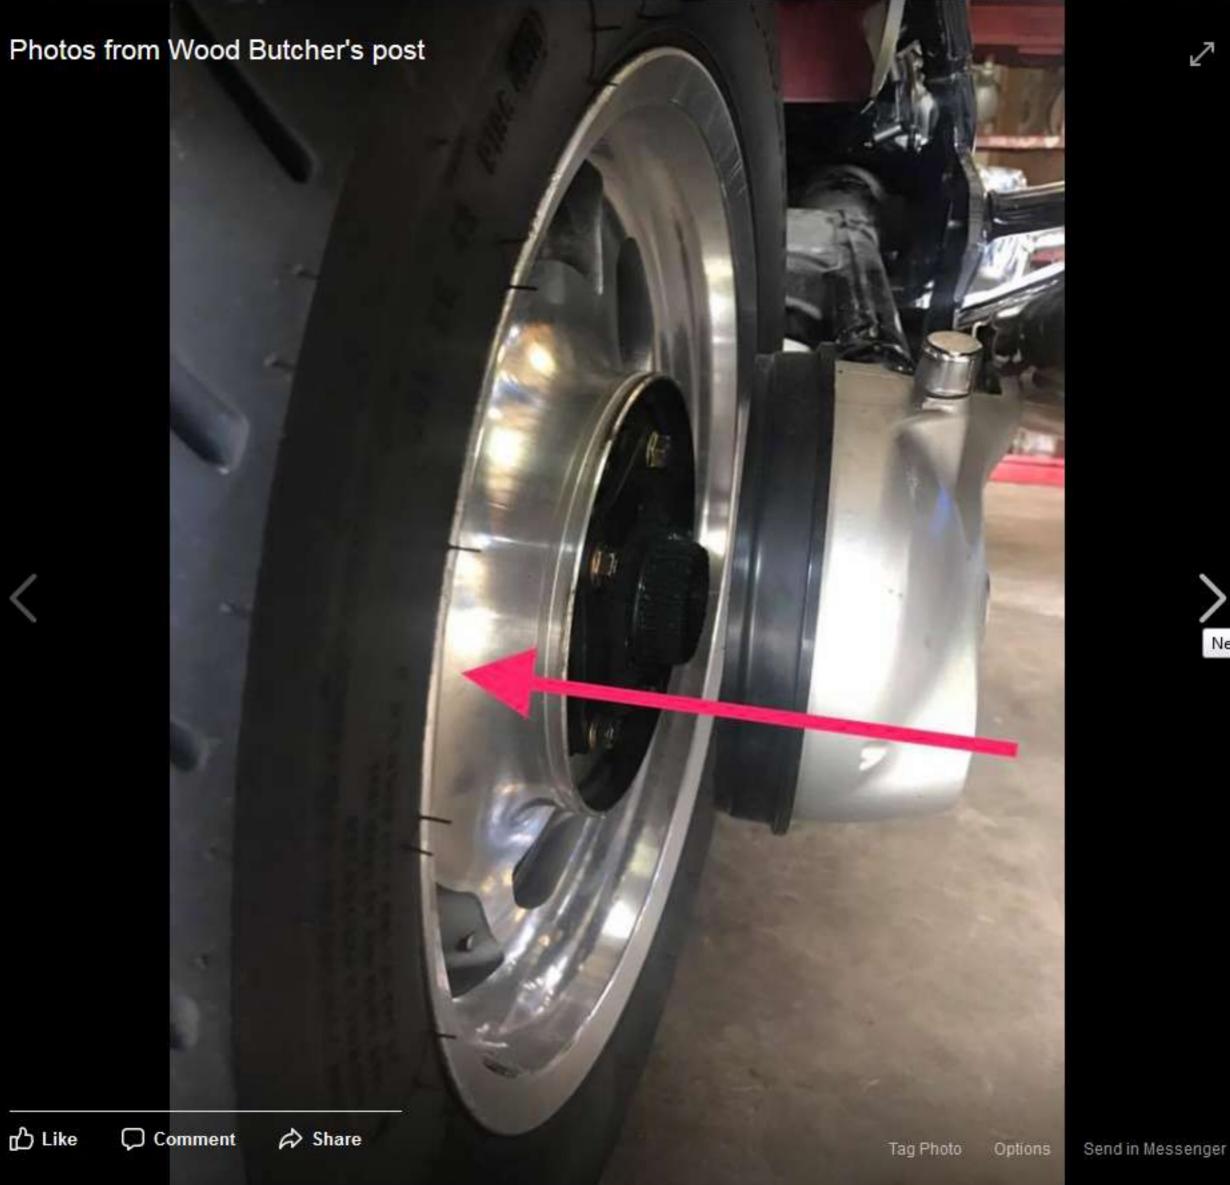



Pull the wheel to the left side until it comes out of the final drive splines

Like
 □ Comment
 ⇔ Share







Write a comment...








Friend Requests

See All



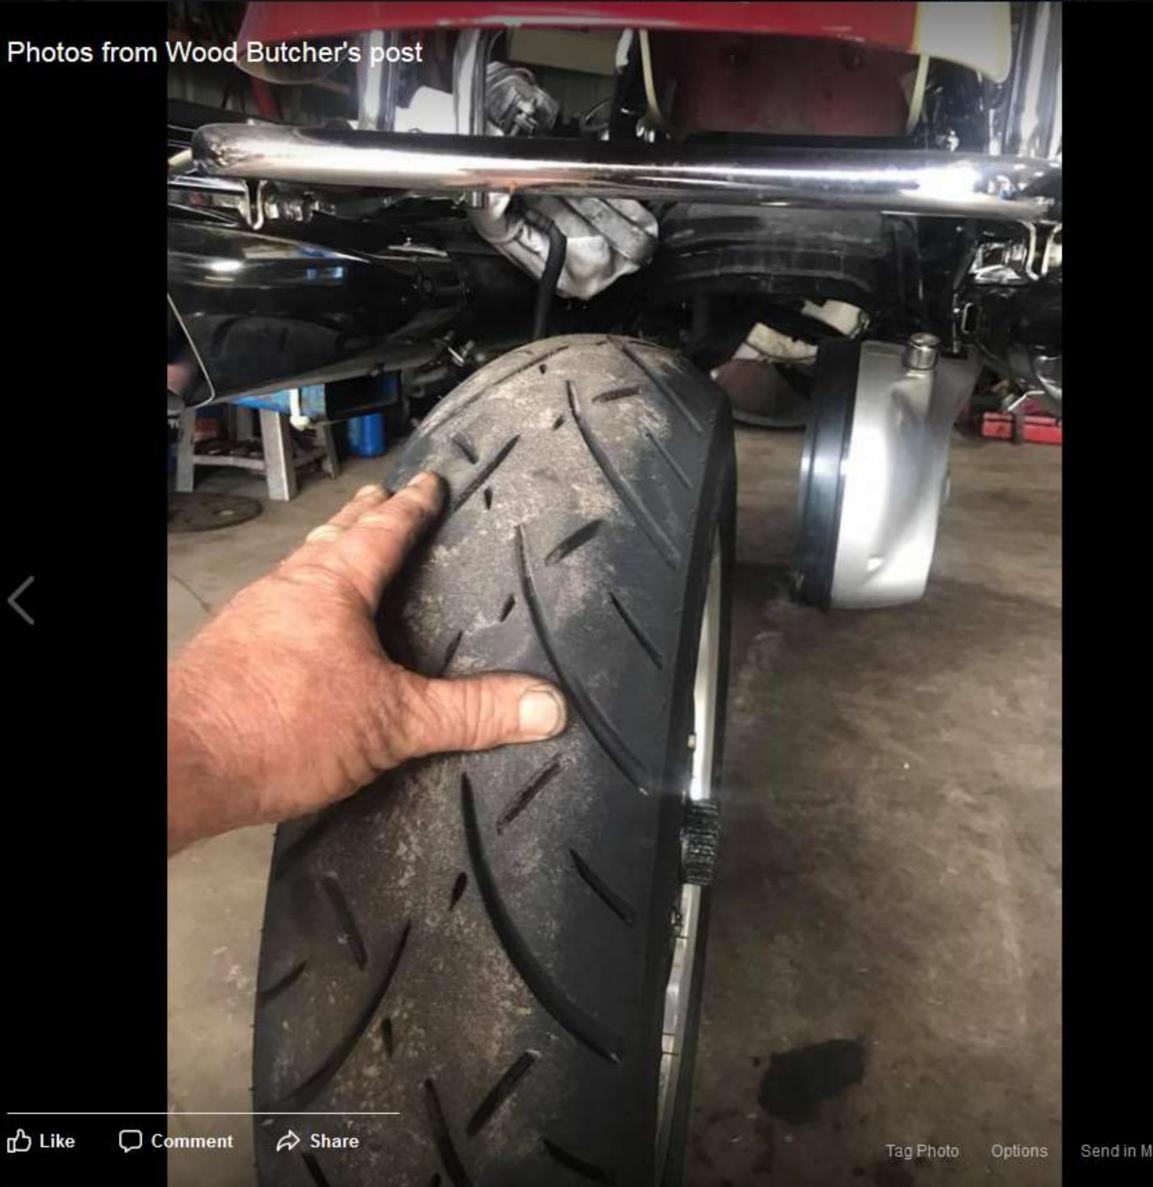



18 hrs - @

Raise the rear of the bike enough to roll the wheel out from under the fender

Like Comment A Share

(1) 3



Cindy Ewing Hows that tire look to you? Does it need replacing. Man I wish I was there to clean every nook and cranny as you took it apart....

Like Reply 0 1 2 hrs



Cindy Ewing replied - 4 Replies - 2 hrs



Write a comment...







Friend Requests

See All



Diane Kelly 1+ Confirm Friend

Send in Messenger





This bike was supposedly just done so we get to check out someone else's work. Looks pretty good so far.

Like
 □ Comment
 ⇔ Share

Write a comment...

© @ @ ®







See All








Now remove the top 2 nuts we loosened earlier and pull the final drive and driveshaft out

Like
 □ Comment
 ⇔ Share



Friend Requests

See All

© @ @ Ø









Wood Butcher ▶ Honda Valkyrie 18 hrs - 🚱

Seperate the driveshaft from the final drive by giving it a quick jerk out. Sometimes it's a little tough to get out but it will come. Push it in all the way then jerk out on it.

Like
 □ Comment
 ⇔ Share



Write a comment...









Friend Requests







This is the pinion cup, looks pretty good almost too much grease causing the holes to be plugged in the bottom but not bad.

Like
 □ Comment
 ⇔ Share

Write a comment...

© @ @ @







Friend Requests

See All



Diane Kelly 14 Confirm Friend

Like







Next push loosen both ends of the u joint boot, push it back away from each end so it's just floating


Like
 □ Comment
 ⇔ Share

Write a comment...

© @ @ 0

See All



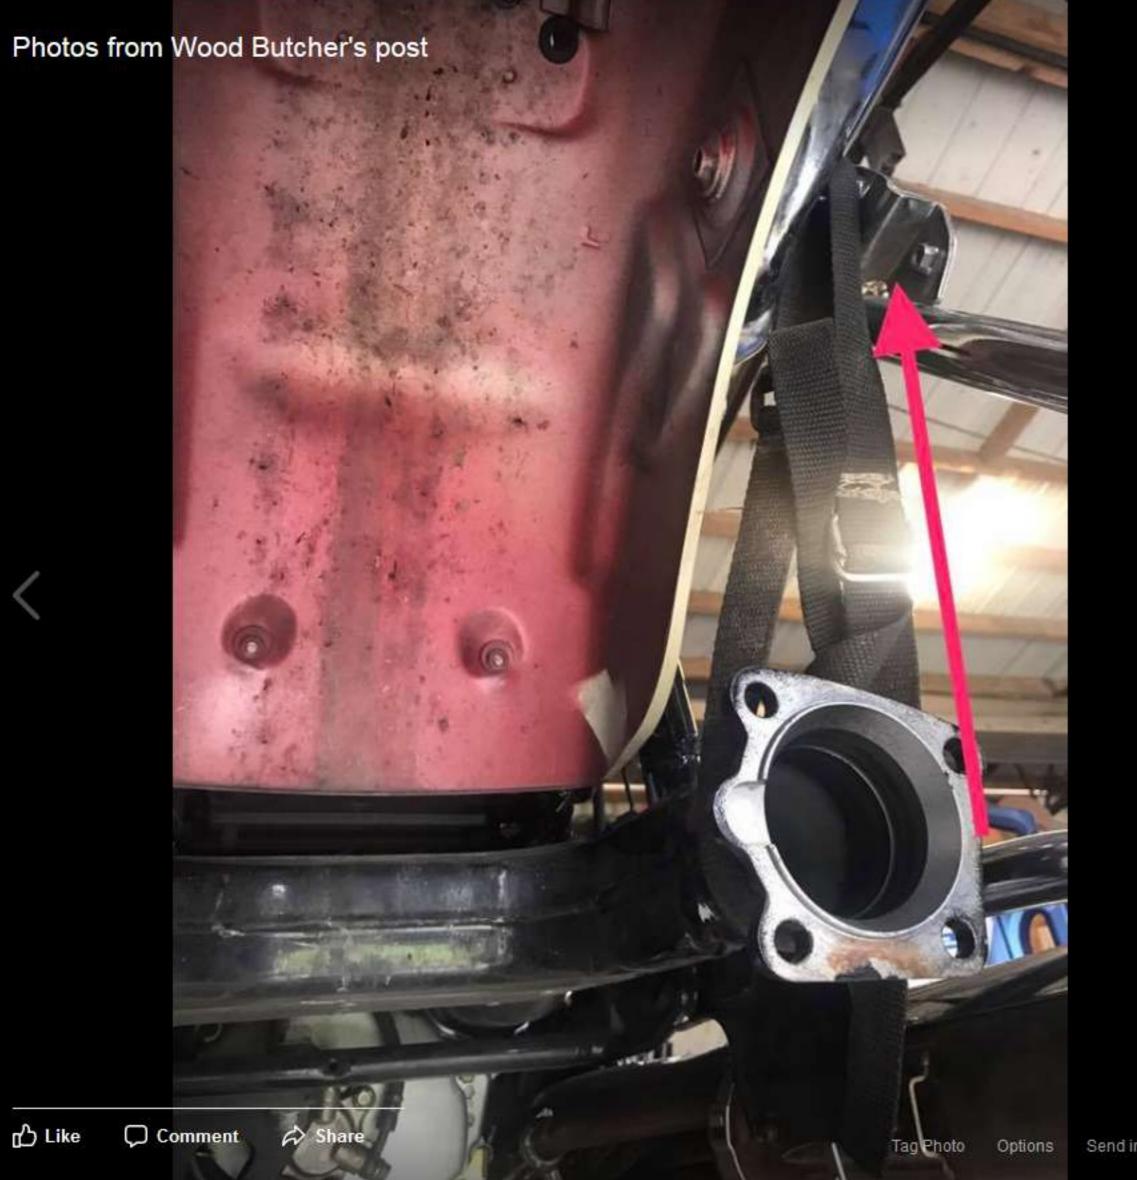



Raise the swingarm up so it's almost level so the u joint will come out the front

Like
 Comment
 Share



Write a comment...






(1) (a) (b) (c)

Friend Requests

See All



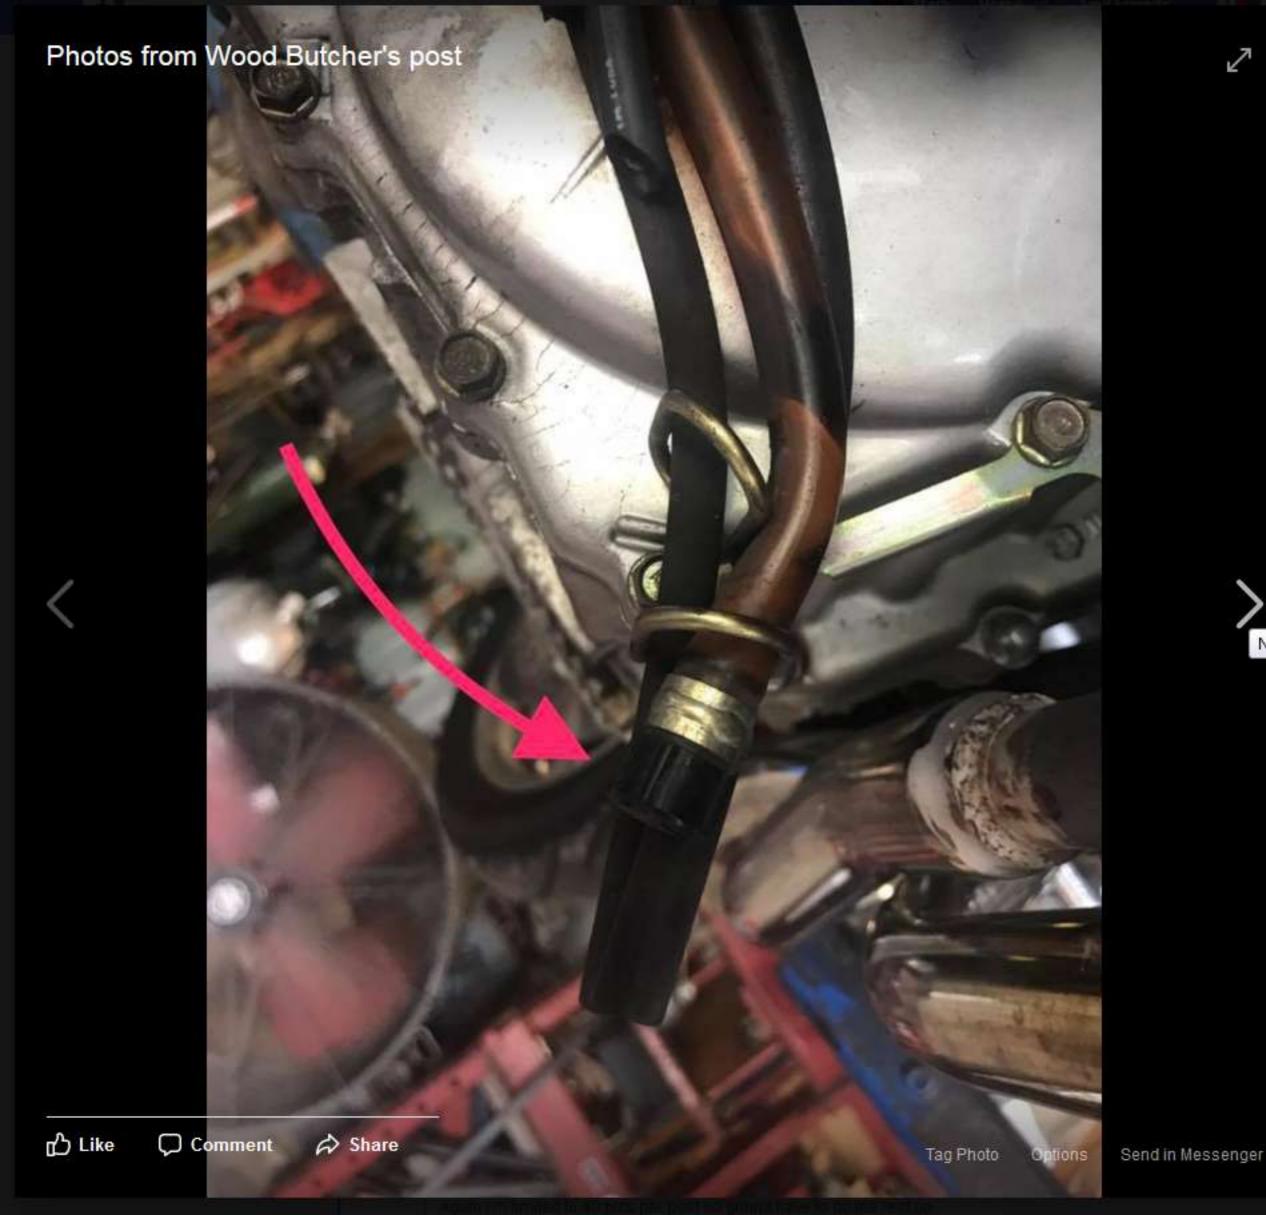



Write a comment...

Next

Friend Requests

See All

© @ @ Ø



La Confirm Friend





This is the Dragon drool tube that needs to be drained each time you service the final drive

Like Comment A Share




© @ @ @

Friend Requests

See All






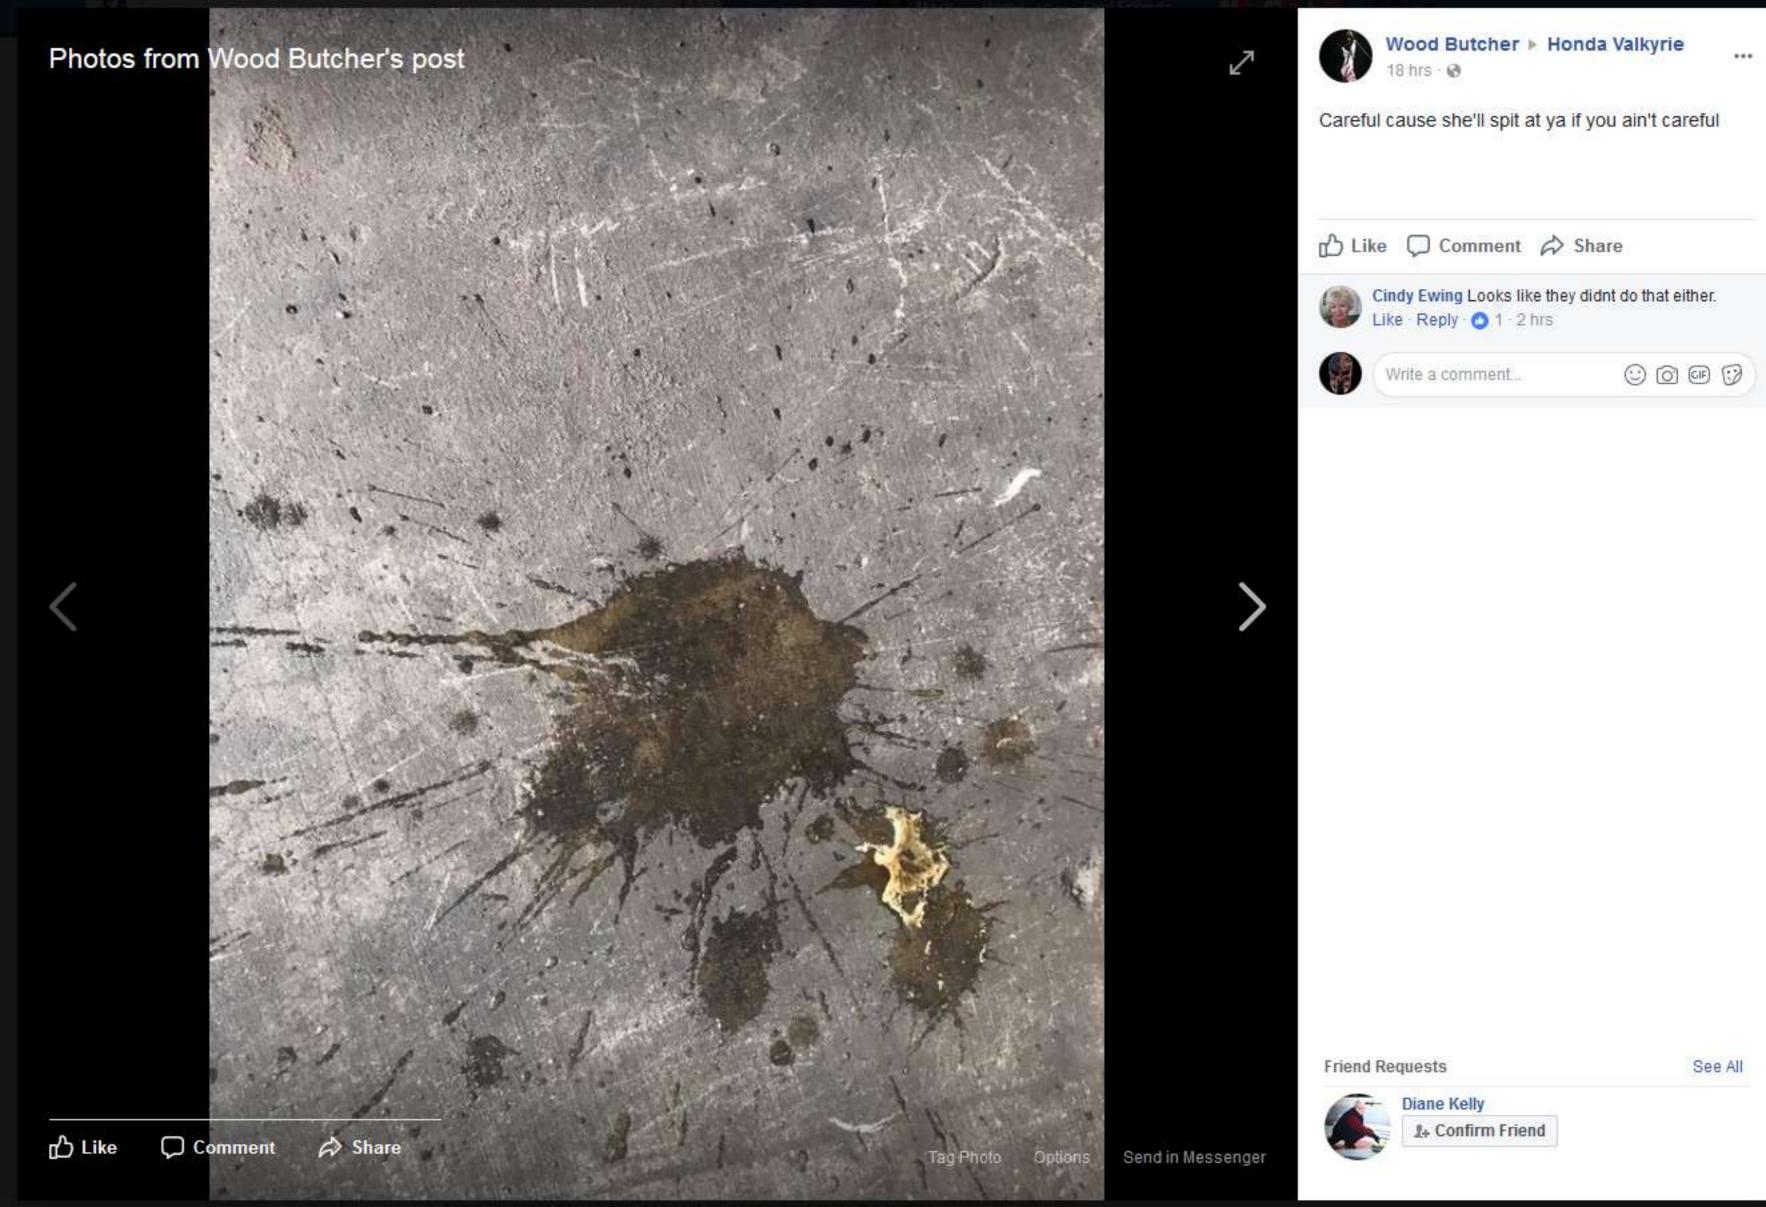



Remove the rear brake master cylinder cover and mounting bolt

Like
 □ Comment
 ⇔ Share



© @ @ @


Friend Requests

See All





Like







Wood Butcher ▶ Honda Valkyrie

18 hrs - 🚱

Swing it down out of the way

Like
 □ Comment
 ⇔ Share

Write a comment...



© @ @ 0



Friend Requests

See All

Diane Kelly 1+ Confirm Friend

Comment Comment

凸 Like

⇔ Share

Tag Photo

Options


Send in Messenger





Push the boot forward and then push the u joint back off the output shaft

Like
 □ Comment
 ⇔ Share




Friend Requests

See All

© @ @ @



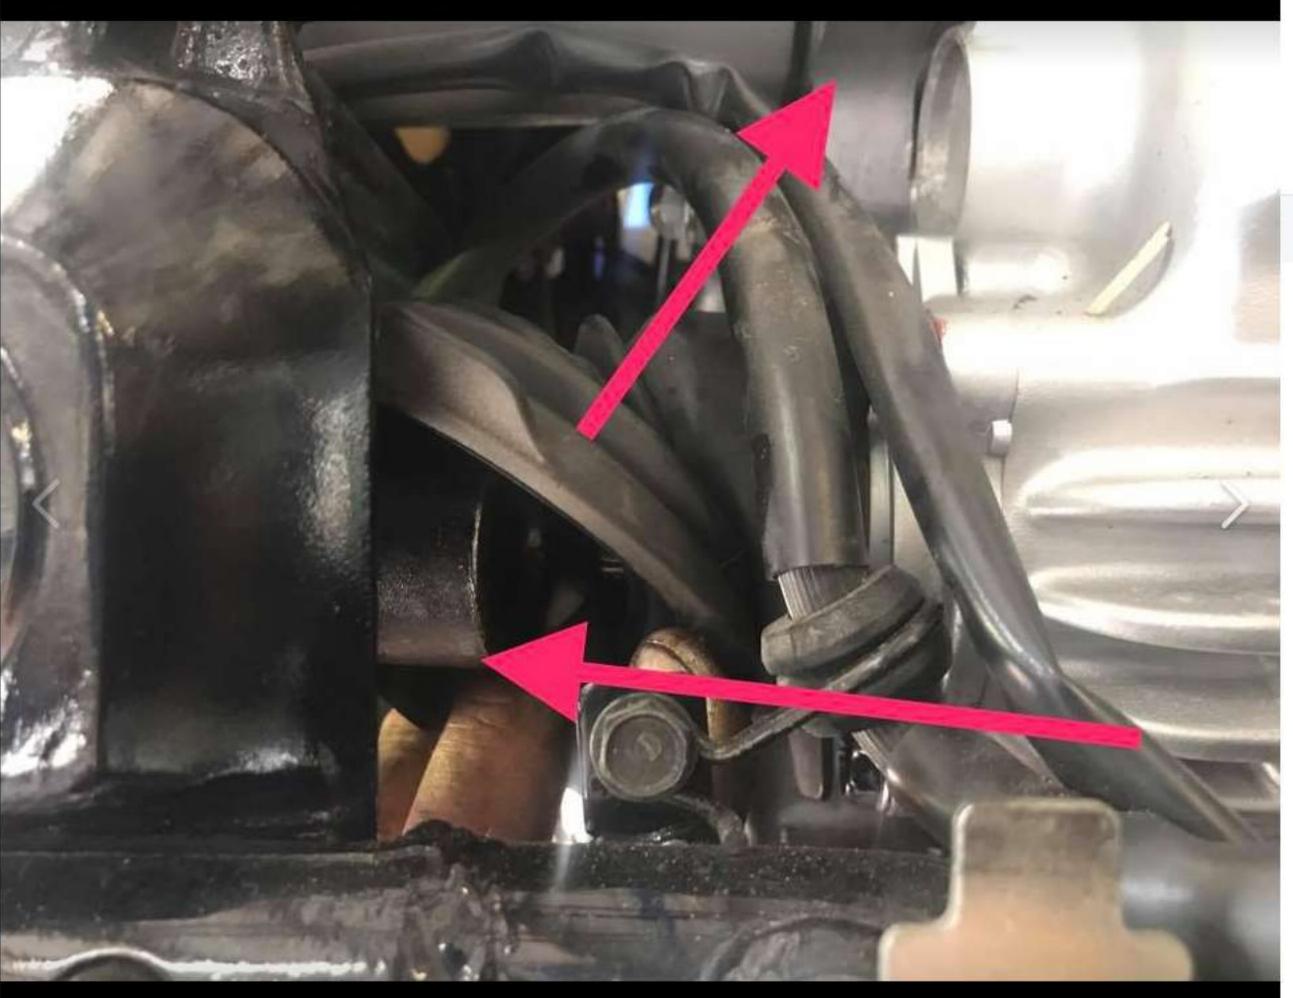









Then slide the boot out between the u joint and the output shaft

Like
 □ Comment
 ⇔ Share



© @ @ Ø

Friend Requests

See All





18 hrs - 🚱

Many a men have cussed this little boot when reinstalling but we've learned a secret from past members on how to do it easier

Like
☐ Comment
☐ Share





Write a comment...

© @ @ 9



Friend Requests

See All



Like

Comment







Then pull the u joint up out of the hole. You may need to slightly lower the swingarm to clear enough for it to come out but it will tocome out

Like
 □ Comment
 ⇔ Share



© @ @ 0

Friend Requests









goes to the front?

Out of room for pictures so gonna go clean up some parts and start the lube and re install. Will post it soon. Thanks

Part 2

https://www.facebook.com/groups/2232984346/ permalink/10155750757364347/

Like
 □ Comment
 ⇔ Share











Friend Requests



Comment

Like